NEW CAMLOCK SCREENS INSIDE!

30 IN./LBS

FILT RATION Protecting Product and Equipment from Particulates



Rubber Fab's Fluid Filtration Gaskets
Rubber Fab's sanitary fluid filtration gaskets are

designed to be interchangeable with standard sanitary clamp gaskets. You can choose a screen gasket in a USP Class VI elastomer or fluoroelastomer in a variety of mesh sizes, 10 micron through 4 mesh. Most of these are available for shipment on the day of order.

Our fluid filtration gaskets are also available in Detectomer[®], a metal detectable/x-ray inspectable elastomer for use with metal detection and x-ray devices. X-ray inspection and metal detection systems provide confidence to food, dairy and pharmaceutical manufacturers by insuring product safety outlined in the Food Modernization Act. Detectomer[®] fluid filtration gaskets provide the security needed to avoid recalls, waste, and costly downtime.

We hope after you have reviewed Rubber Fab's Fluid Filtration Program, you will once again discover...**the Rubber Fab Difference**.

Full Range of Particulate Elimination

If the complete elimination of particulates is critical to the **CGMP** in your injectable filled product, chromatography, columns, upstream particulate removal, or downstream filtration, consider the full range of **Rubber Fab's Fluid Filtration technology**.

Fluid filtration gaskets provide the most comprehensive range of stainless steel mesh and filter cloth which provide for **particulate elimination** to protect fill and finish sterile products. As illustrated here, you can see a progressive large to fine particulate elimination system utilizing **10**, **20**, **40**, **60**, **80**, **and 100 mesh screens**.

Our filter cloth screen construction is Dutch Twill weave which provides for maximum strength and minimum pressure drop.


Materials Available

Fluid filtration gaskets are manufactured in the following elastomers:

- FKM Fluoroelastomer
- EPDM
- Platinum Silicone
- Buna*
- PTFE (fluoropolymer)
- Detectomers[®] Metal Detectable/ X-ray Inspectable
- Tuf-Steel®
- * Buna does not pass U.S. Pharmacopeia Class VI Certification and Cytotoxicity.

Available Sizes

- 1/2", 3/4"
- 1", 1-1/2", 2", 2-1/2", 3", 4" and 6" sanitary screen gaskets

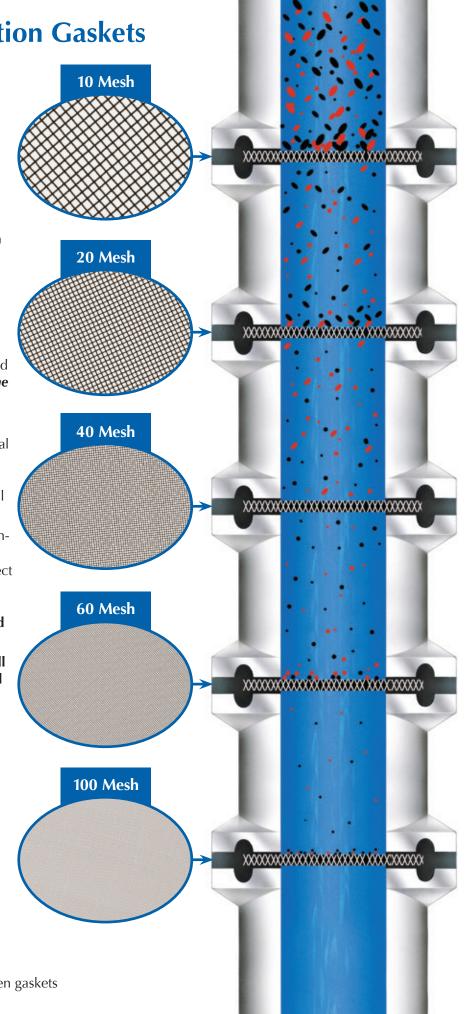

Tri-Clamp[®] Sock Screens: Fluid filtration gaskets designed for greater soil capacity

The extended sock shaped mesh gasket offers up to 5 times more open area for 5 times more soil collection capability than conventional screens. They provide greater flow for situations where a large amount of particulates are involved. Due to the large capacity and open screen area, sock screens require less service therefore reducing down time and costly change outs, a major consideration with in-line pharmaceutical processing.

While protecting expensive processing pumps and equipment from foreign matter, sock screens are especially effective in decreasing pump wear and burnout while increasing energy conservation. Regularly used in the transfer of liquids from a bulk tank to a tank truck and/or in the opposite direction, sanitary sock screens are specifically designed for high volume applications with low pressure drop.



Superior Quality

- Rubber Fab sock design assures a tight fit while allowing continuous fluid flow and filtration.
- Available in 10 mesh to 325 mesh with standard 16 mesh and 10 mesh in stock
- Electropolishing available
- Durable 316 Stainless Steel with the elastomer of your choice:
 - EPDM
- Silicone
- FKM
- Buna
- Available configurations:
 - Tri-Clamp[®]
- Bevel Seat
- Camlock

Superior Performance

- Fully reusable.
- Eliminates leaks and breakage in your lines.

Superior Economy


 Dramatically increases unloading pressures for smoother operation.

Applications

- In-line fluid conditioning
- Pump protection





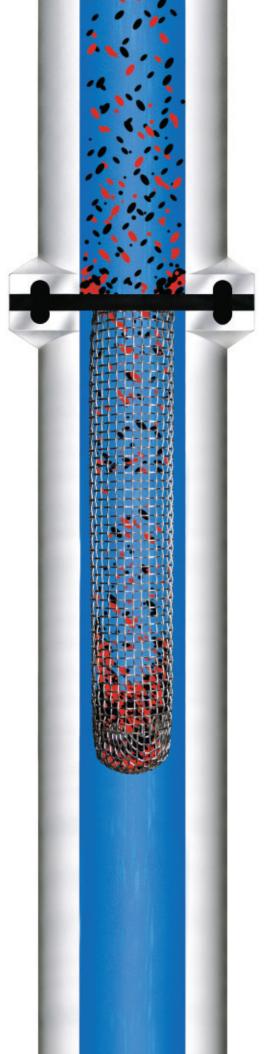

Camlock Perforated Plate Gasket

New to the Rubber Fab perforated plate line of products is the Camlock perforated hole plate gaskets. These gaskets are ideal for large particulate filtration.

Perforations Available

- Available in .033", .045", .062", .094", .125", .187" .250", .375" and .500" perforations (minimums apply)
- Consult factory for custom hole configurations

Available Sizes

• 1-1/2", 2", 2-1/2", 3", 4" and 6" (Consult factory for 6")

Materials Available

- FKM Fluoroelastomer
- EPDM
- Platinum Silicone
- Buna*
- Buna does not pass U.S. Pharmacopeia Class VI Certification and Cytotoxicity.

Also Available

- 6" lengths as a standard stock
- Electropolished
- Orifice Plate style










Did You Know?-

Rubber Fab makes Ansi Flange Full Face 150# (ANSI B16.5) Screens. These gaskets are suitable for service with ANSI 150# rated flanged connections.

- Available in the following materials: Buna, EPDM, FKM Fluoroelastomer, Platinum Silicone
- Metal Detectable/X-ray Inspectable Buna and Silicone
- Offered in 4 100 Mesh
- Sizes Ranging from 1/2" to 12"

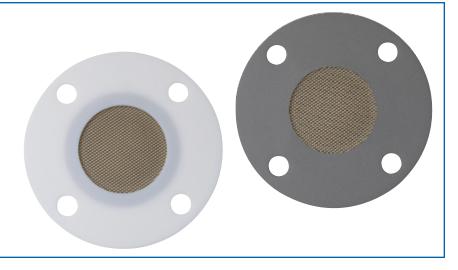

Tri-Clamp® **Perforated Plate Gaskets**

Rubber Fab also offers a full line of perforated plate gaskets.

Perforations Available

- .033" standard. Also available in .045", .062", .094", .125", .187" .250", .375" and .500"
- Consult factory for custom hole configurations

Available Sizes


• 1/2", 3/4", 1", 1-1/2", 2", 2-1/2", 3", 4" and 6"


Materials Available

- FKM Fluoroelastomer
- EPDM
- Platinum Silicone
- Buna*
- PTFE (fluoropolymer)
- Tuf-Steel®
- Buna does not pass U.S. Pharmacopeia Class VI Certification and Cytotoxicity.

Also Available

- Removable gasket holders available for all discs
- Screen disc inserts
- Perforated disc inserts
- Orifice plate inserts

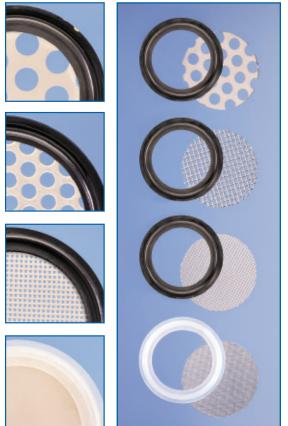

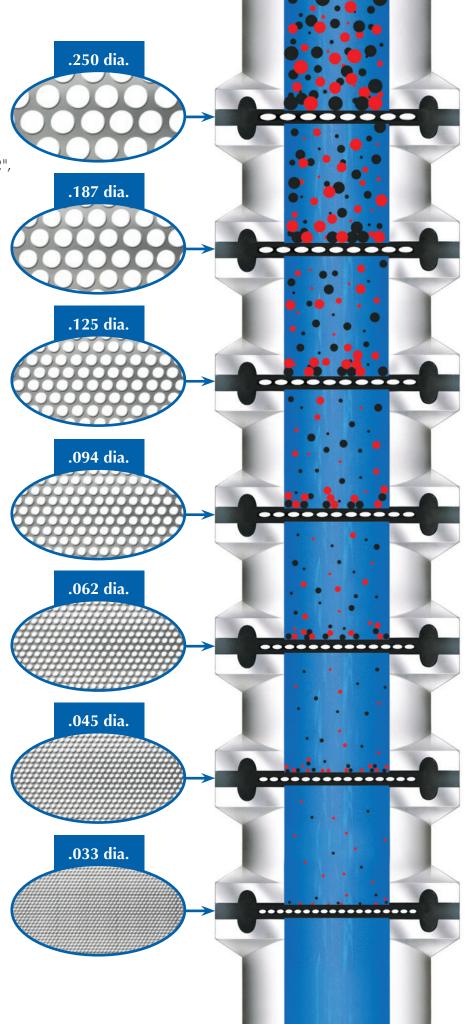

Camlock Screen Gasket

Rubber Fab offers a complete line of Camlock Screen Gaskets specifically designed to protect your pump during transfer of materials from tanker to silo. The extended **sock screen** mesh gasket offers up to 5 times more open area for 5 times more soil collection capability than conventional screens.

Available Mesh

• 10 - 100 screen mesh


Available Sizes


• 1", 1-1/2", 2", 2-1/2", 3", 4" and 6" (Consult factory for 6")

Materials Available

- FKM Fluoroelastomer
- EPDM
- Platinum Silicone
- Buna*
- Detectomer[®] Metal Detectable/ X-ray Inspectable Buna and Silicone

* Buna does not pass U.S. Pharmacopeia Class VI Certification & Cytotoxicity.





of all gaskets make for ease of installation and removal.

Also Available

 Sock Screens are available in 6" lengths as a standard stock. Consult factory for other lengths.









Female Camlock Fitting, a Camlock Screen Gasket and a Male Camlock shown above



Fluid Filtration Screen Reference Chart

| APPROX. RETENTION MICRONS | OPENING (INCHES) | MESH (WIRES/INCH) | OPEN AREA % | FILTER CLOTH MESH | FILTER CLOTH THICKNESS |
|---------------------------|---------------------|----------------------|----------------|----------------------|---------------------------|
| 5156 | 0.203 | 4 x 4 | 65.9 | - | - |
| 3340 | 0.110 | 6 x 6 | 62.4 | - | - |
| 2464 | 0.097 | 8 x 8 | 60.2 | _ | - |
| 1905 | 0.075 | 10 x 10 | 56.3 | _ | _ |
| 1532 | 0.060 | 12 x 12 | 52.4 | _ | _ |
| 1306 | 0.051 | 14 x 14 | 51.8 | _ | _ |
| 1130 | 0.045 | 16 x 16 | 50.7 | _ | _ |
| 979 | 0.039 | 18 x 18 | 48.2 | _ | _ |
| 864 | 0.034 | 20 x 20* | 46.2 | _ | _ |
| 703 | 0.028 | 24 x 24 | 44.1 | _ | _ |
| 516 | 0.020 | 30 x 30 | 37.2 | - | _ |
| 381 | 0.015 | 40 x 40* | 36.0 | _ | _ |
| 318 | 0.013 | 50 x 50* | 30.3 | _ | _ |
| 233 | 0.009 | 60 x 60 | 30.3 | - | - |
| 160 | 0.007 | 80 x 80* | 31.4 | _ | _ |
| 140 | 0.006 | 100 x 100* | 30.3 | - | _ |
| 118 | 0.005 | 120 x 120 | 30.9 | - | - |
| 103 | 0.004 | 150 x 150 | 37.2 | _ | _ |
| 96 | _ | _ | _ | 20 x 200 | 0.033 |
| 80 | 0.003 | 180 x 180 | 34.3 | _ | _ |
| 74 | 0.002 | 200 x 200 | 33.6 | _ | _ |
| 70 | _ | _ | _ | 120 x 180 | 0.010 |
| 65 | _ | _ | _ | 120 x 200 | 0.009 |
| 61 | 0.002 | 250 x 250 | 36.0 | _ | _ |
| 50 | _ | _ | _ | 120 x 330 | 0.010 |
| 43 | 0.001 | 325 x 325 | 29.7 | - | - |
| 40 | _ | _ | _ | 120 x 400 | 0.009 |
| 35 | _ | _ | - | 120 x 500 | 0.009 |
| 30 | - | - | - | 120 x 600 | 0.009 |
| 25 | _ | _ | _ | 200 x 600 | 0.006 |
| 21 | _ | _ | _ | 200 x 830 | 0.006 |
| 10 | _ | - | _ | 200 x 1150 | 0.006 |

^{*}Stock Items in Stainless Steel 316. Also available: Hastelloy or PTFE Screen (limited mesh for removable gasket holders only).

Perforated Plate Reference Chart

| reflorated rate reference chart | | | | | | | | |
|---------------------------------|--------------------------|------------------------------|--------------------|-------------|--|--|--|--|
| DIAMETER DECIMALS | DIAMETER FRACTION INCHES | CENTER TYPE | HOLES PER SQ. INCH | OPEN AREA % | | | | |
| .033" | | .055" STRAIGHT LINE CENTERS | 330 | 28% | | | | |
| .045" | | .066" STRAIGHT LINE CENTERS | 225 | 36% | | | | |
| .062" | 1/16" | .094" STAGGERED LINE CENTERS | 132 | 41% | | | | |
| .094" | 3/32" | .156" STAGGERED LINE CENTERS | 46 | 33% | | | | |
| .125" | 1/8" | .187" STAGGERED LINE CENTERS | 33 | 40% | | | | |
| .187" | 3/16" | .250" STAGGERED LINE CENTERS | 18 | 50% | | | | |
| .250" | 1/4" | .375" STAGGERED LINE CENTERS | 330 | 58% | | | | |
| | | | | | | | | |

Fluid Conditioning Applications

- · Prefiltration for critical membrane filters
- Coalescence of water vapor from process lines
- · Liquid gassing or degassing
- · Large particulate removal before fill and finish
- · Turbulence generation for enhanced mass or heat transfer
- Protection for pump, check valves, and components
- Particulate removal in sterile filling operations
- Sparging
- Chromatography purification
- Metal Detectable Elastomers available

Meets High Pharmaceutical Standards

- U.S. Pharmacopeia Class VI Certification
- Cytotoxicity Criteria
- Title 21 CFR 177.2600
- Title 21 CFR 177.1550
- USDA Sanitary Standards
- 3-A Sanitary Standards
- Current Good Manufacturing Practices (CGMP)
- ASME-BPE Standards
- Animal Derived Ingredient Free*
- ® Tuf-Steel and ADI Free are registered trademarks of Rubber Fab Technologies Group. Metal Detectable products US patent #7,390,580.
- * Buna in not an ADI Free elastomer.

















Distributed by:

Rubber Fab

a Garlock Hygienic Technologies company

26 Brookfield Drive • Sparta, NJ 07871 Phone: 973.579.2959 • Fax: 973.579.7275 Toll Free: 1.866.442.2959

www.rubberfab.com

Rubber Fab is a member of:



International Association of Food Industry Suppliers







Rubber Fab offers a wide array of high quality, after market screen products for the tableting and coating industry.

Our factory consultants can work with you to lower your costs, and increase quality though our superior identification practices.

Applications

- Tablet presses
- Fluidizer beds
- Sifters
- All major manufacturers

Features

- Plasma etched identification (product, heat number, lot, diameter, mesh size)
- Precision CNC cut
- Seemed welds
- Crush proof packaging
- Just in time inventory program