
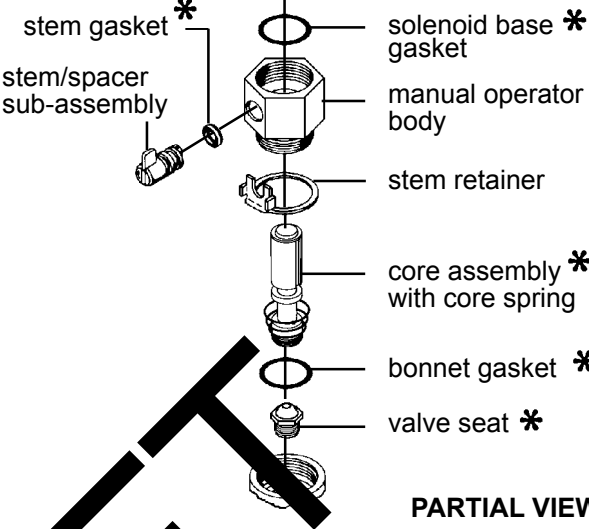



IMPORTANT
 Captive spacer on stem/spacer sub-assembly must be located on the outside of stem retainer when reassembled.

MANUAL OPERATOR (OPTIONAL)

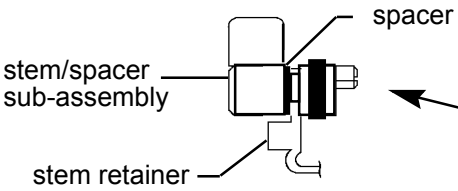

PARTIAL VIEW

IMPORTANT
 See torque chart

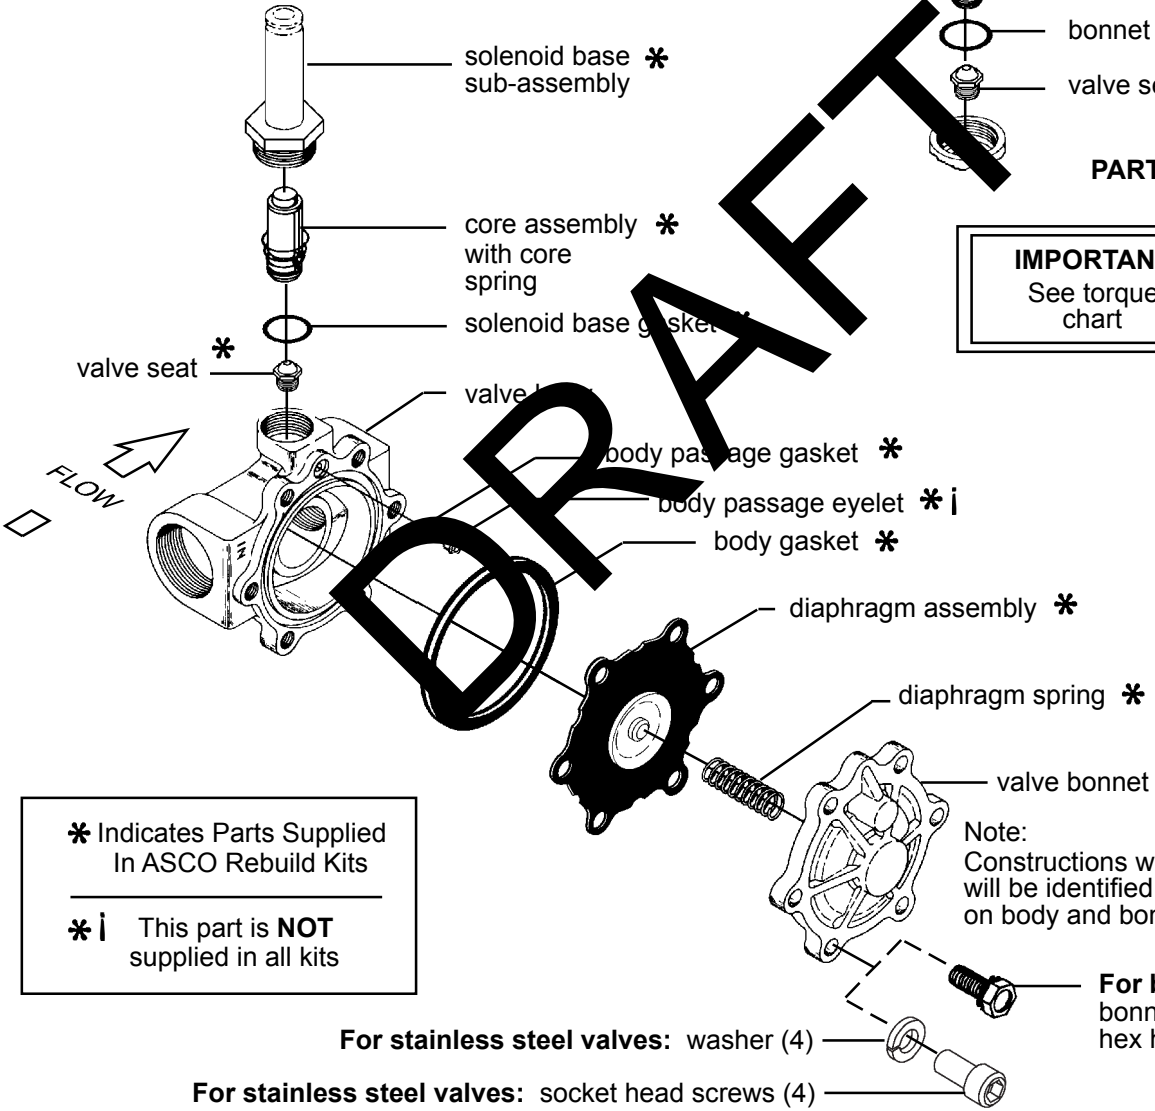

* Indicates Parts Supplied In ASCO Rebuild Kits
 * i This part is NOT supplied in all kits

Note:
 Constructions with "LF" suffix will be identified with "LF" mark on body and bonnet.

For brass valves:
 bonnet screw (4)
 hex head

For stainless steel valves: washer (4)
For stainless steel valves: socket head screws (4)

Figure 2. Series 8210 valve without solenoid, DC construction with 1 1/2" NPT valve body shown.